

Sample card fabric expansion joints

FABRICS

THERMOTEX 1225 SS HT 700 - N°22

Description: Filament of stainless steel reinforced E-glass fibres finished on silica acid basis 1390 g/m²

Application: Supporting fabric, cover fabric for insulation materials

Weight (g/m²)	1390	Thermal conductivity	0,15
Thickness (mm)	1,8	Tensile strength (N/cm)	1200 x 900
Temperature (°C)	650	Color	Yellow

FABRICS

THERMOTEX 1080 SS HT 800 - N°109

Description: Filament of stainless steel reinforced E-glass fibres finished with anorganic high temperature coating 1080 g/m²

Application: Supporting fabric, cover fabric for insulation materials

Weight (g/m²)	1080	Thermal conductivity	0,15
Thickness (mm)	1,55	Tensile strength (N/cm)	1200 x 900
Temperature (°C)	800	Color	Green

FABRICS

THERMO B 1300 HT 1000 - N°24

Description: Textured fabric with pure silicate (SiO₂) fabric yarns 1300 g/m²

Application: Insulation fabric for high temperature range. Good chemical resistance to acids


Weight (g/m²)	1390	Thermal conductivity	0,14
Thickness (mm)	1,37	Tensile strength (N/cm)	790 x 540
Temperature (°C)	1000	Color	Beige

Contact

DEKOMTE BENELUX BVBA

Simon Stevinstraat 8 | 8400 Oostende - Belgium | T +32 (0) 59 51 07 55 | F +32 (0) 59 51 07 87 | E info@dekomte.be



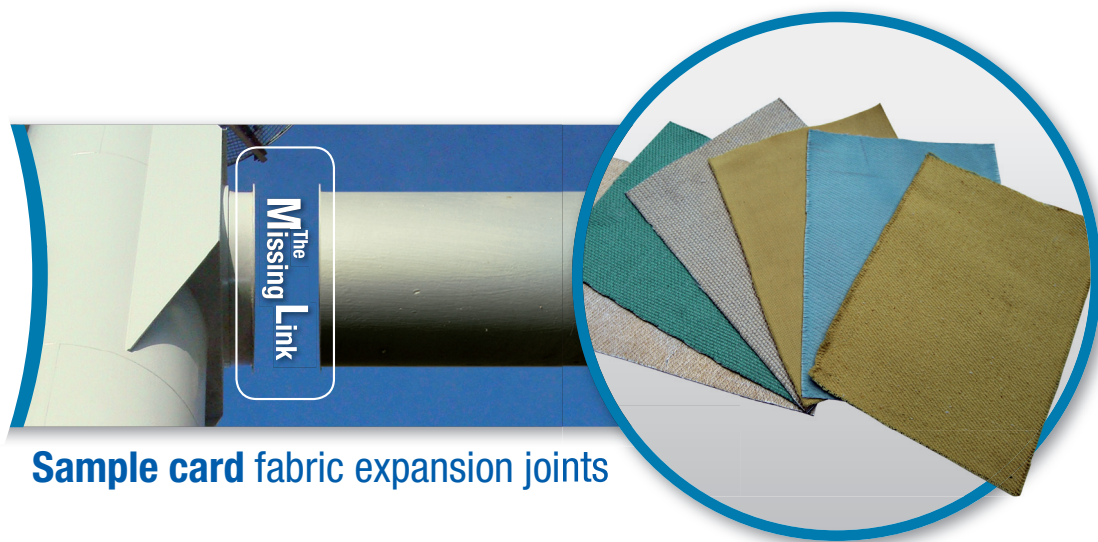

Sample card fabric expansion joints

FABRICS

THERMOTEX 1100 HT1100 - N°110

Description: Textured fabric with pure silicate (SiO₂) fabric yarns 1100 g/m²

Application: Insulation fabric in extreme high temperature range

Weight (g/m²)	1100	Thermal conductivity	0,09
Thickness (mm)	1	Tensile strength (N/cm)	450 x 350
Temperature (°C)	1100	Color	Light-yellow / white

FABRICS

KEVLAR 400 FLEXTRA - N°102

Description: Flexible kevlar fabric made of 85 % para-aramid fibres and 15% viscose

Application: Supporting fabric for heavy mechanical loads and vibrations

Weight (g/m²)	400	Thermal conductivity	0,11
Thickness (mm)	0,8	Tensile strength (N/cm)	2800 x 1400
Temperature (°C)	300	Color	Yellow

FABRICS

KEVLAR 500 - N°74

Description: Fabric made of Kevlar para-aramid 100% fibres

Application: Supporting fabric for heavy mechanical loads and vibrations

Weight (g/m²)	500	Thermal conductivity	0,11
Thickness (mm)	1,6	Tensile strength (N/cm)	3470 x 1840
Temperature (°C)	300	Color	Yellow

Contact

DEKOMTE BENELUX BVBA

Simon Stevinstraat 8 | 8400 Oostende - Belgium | T +32 (0) 59 51 07 55 | F +32 (0) 59 51 07 87 | E info@dekomte.be

